



COMAX ROOFS®

Finishing your Beautiful Home



COMAX KLIK 25

PUR/PA, th. 0,55 mm 7016

STANDING SEAM ROOFING:

COMAX KLIK 25, 38

COMAX FALC





CZECH MANUFACTURER
OF SHEET METAL ROOFING

COMAX KLIK 25, 38

- **Modern, easy-fit standing seam system with a 75 year warranty**
(75 year warranty applies to aluminium Klik, with PVDF and PUR/PA coating)
- Available in **aluminium** or **steel**, suitable for pitches down to 5°
- Two profiles to choose from, depending on personal choice and geographical area
- Suitable for new buildings, and refurbishment due to its light weight at only 2.35 kg per sqm (aluminium option)
- All sheets are supplied cut to length based on roof assembly plan, meaning minimum waste material
- Supplied along with all fitting components directly to the site
- Fitting of the roofing or the cladding is very simple and fast, saving time and labour costs.
New production line from October 2021 means more production options.



MANUFACTURING OPTIONS:

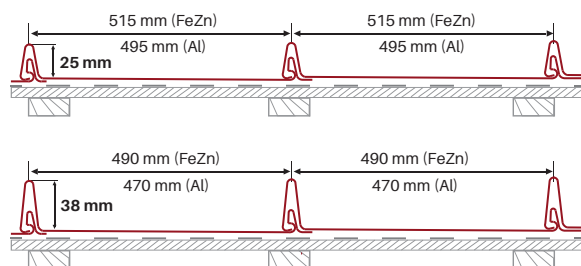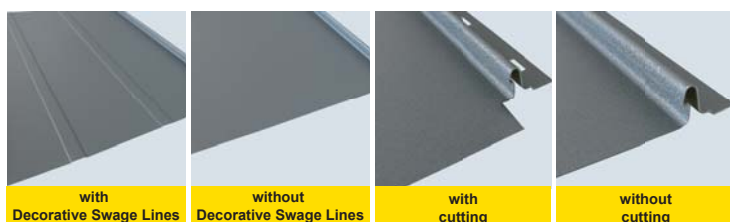

TECHNICAL DATA:

| Material | KLIK 25 mm | | KLIK 38 mm | |
|-------------------------------|---------------|----------|---------------|----------|
| | FeZn | Al | FeZn | Al |
| Material thickness | 0,5 - 0,55 mm | 0,7 mm | 0,5 - 0,55 mm | 0,7 mm |
| Effective width of profile | 515 mm | 495 mm | 490 mm | 470 mm |
| Height of profile | 25 mm | 25 mm | 38 mm | 38 mm |
| Minimum length | 850 mm | 850 mm | 850 mm | 850 mm |
| Maximum length | 8 000 mm | 8 000 mm | 8 000 mm | 8 000 mm |
| Min. pitch without connection | * 5° | * 5° | 14° | 14° |
| Min. pitch with connection | 15° | 15° | 20° | 20° |

* Guarantee of roofing - for 5° - 8° warranty a supplementary form is required





COMAX FALC

COILS FOR STANDING SEAM ROOFING

- Prepainted coils for profiling of standing seam roofing system with a 75 year warranty (75 year warranty applies to aluminium Klik, with PVDF and PUR/PA coating)
- Available in **aluminium** or **steel**, special alloys developed to easy material forming and fitting, suitable for very detailed roofs and long spans
- Wide range of RAL shades available
- Supply in sheet form cut to length (COMAX FALC 25), or coils to be formed on site with profiling machines (COMAX FALC)
- Traditional material for roofs with pitch down to 4° and demanding weather conditions



PROFILING OF COMAX FALC:

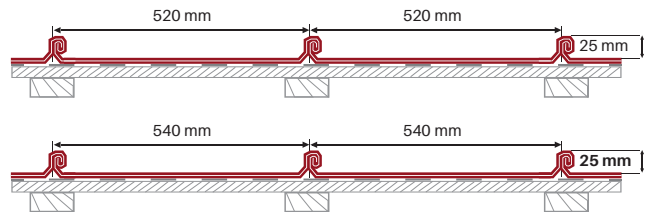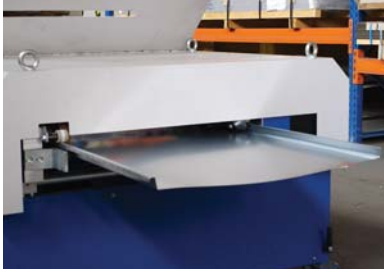

| Material | FeZn | Al |
|------------------------------------------------------------------------|----------------|-----------------|
| Material thickness | 0,50 - 0,65 mm | 0,70 mm |
| Input coil width | 620 mm | 600 mm |
| Parameters of the profiled standing seam roofing COMAX FALC 25: | | |
| Height of profile | 25 mm | 25 mm |
| Effective width of profile | 540 mm | 540 mm / 520 mm |
| Minimum length | 600 mm | 600 mm |
| Maximum length | * 10 000 mm | * 10 000 mm |
| Minimum pitch | 4° | 4° |

* Possibility of profiling up to a length of 15 m;
in case of additional measures - according to the installation instructions





ISO 9001
ISO 14001
ISO 45001
ISO 50001
IATF 16949



An experienced Czech manufacturer of modern sheet metal roofing with its own coating line and an emphasis on the quality and variety of coating - over 600 color shades.

DO NOT MISS:



COMAX BoCo 330



Your COMAX ROOFS® business partner:

Phil Brown

Metal Trade Comax (UK) Ltd

27 Berkeley Road, Trowbridge, Wiltshire, BA14 9DX

Tel.: 01225 302010 / Mobile: 07747 797955

Email: phil.brown@comaxroofs.uk

www.comaxroofs.uk



COMAX ROOFS® is a trademark of company METAL TRADE COMAX, a.s.,
Velvary 420, 273 24, Czech Republic, VAT: CZ49684442, www.mtcomax.cz

CUSTOMER SUPPORT: roofs@mtcomax.cz



07/2021 UK

Our main suppliers for Coil coating:

