



METAL TRADE COMAX, a.s.

COIL COATING

Special coatings




METAL TRADE COMAX, a.s.
273 24, Velvary 420, Czech Republic
coating@mtcomax.cz · www.mtcomax.cz

Member of




PES


Smooth

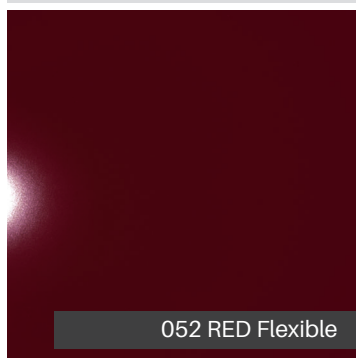


052 RED Flexible

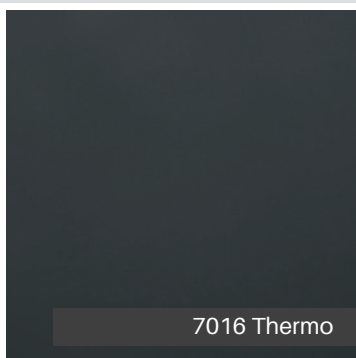

7016 Thermo

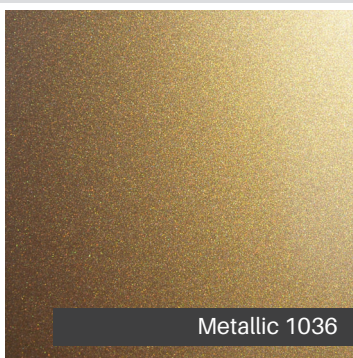


Metallic 1036

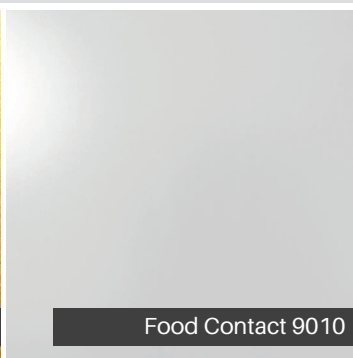


Food Contact 9010

Wrinkled

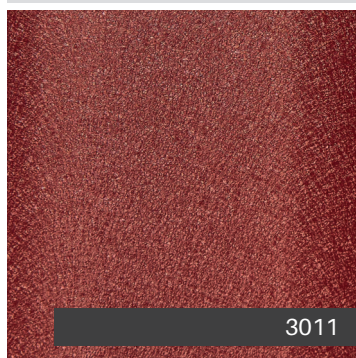

3011

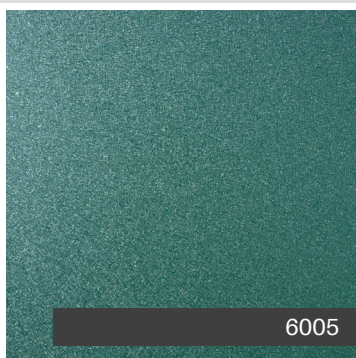

6005




Hellgrau



7016 Mat Fin

Multicolour

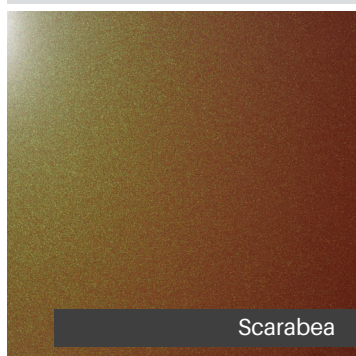


Scarabea

Characteristic


- Very good UV resistance
- Good flexibility
- Up to 400 tones available
- Good price / quality rate

	HD PES	HD PES W	SHD PES
Surface	smooth	wrinkled	smooth
Total thickness of coat	20 - 27 µm	20 - 30 µm	min 35 µm
Resistance	RUV 3	RUV 3	RUV 4


PUR/PA

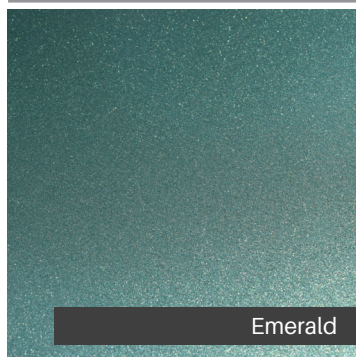

Emerald

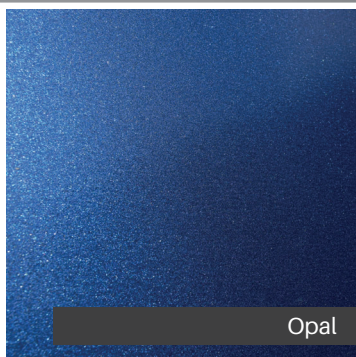

Opal

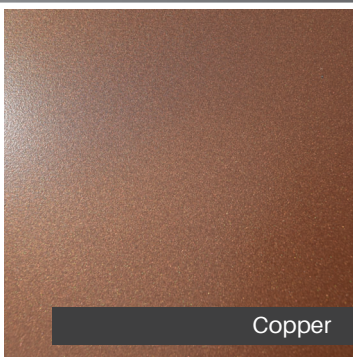

Copper



Grey Rock

Characteristic

- Very good colour and visual stability
- Very good resistance to chemicals
- Great flexibility and formability
- Great abrasion and scratch resistance
- Great corrosion resistance
- Excellent weather resistance


	PUR/PA
Surface	structured
Total thickness of coat	45 - 60 µm
Resistance	RUV 4




PVDF

Possibility of 2-layer, 3-layer or 4-layer system

Multicolour (IRRIDESCENT)

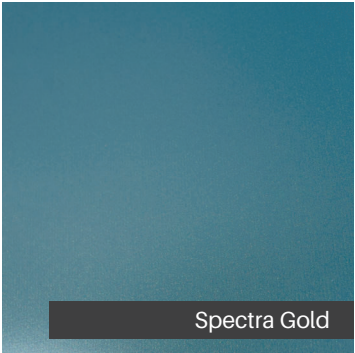

Spectra Gold

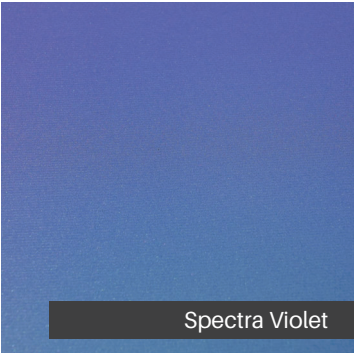

Spectra Violet




Moonstone

Metallic



Gold

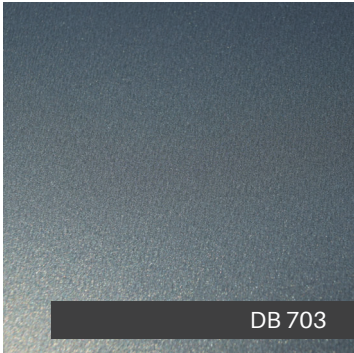

DB 703

Characteristic

- Excellent UV resistance (RUV 4)
- Very good corrosion resistance
- Highly resistant to chemicals
- Good flexibility

	Multicolour
Surface	smooth
Total thickness of coat	42 - 48 µm
Resistance	RUV 4


	PVDF
Surface	smooth
Total thickness of coat	28 - 37 µm
Resistance	RUV 4

GRAVURE 3D


3D Wood Design



Golden Oak

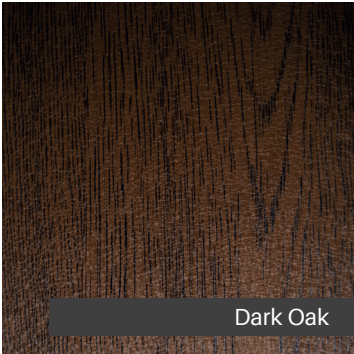

Dark Oak

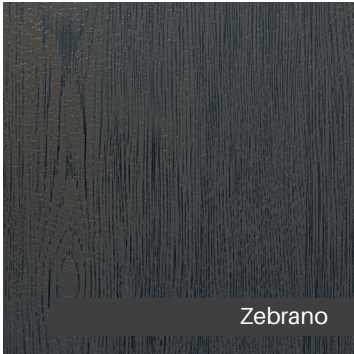

Zebrano



White Oak

GRAVURE 2D

2D Wood Design



WOOD FLAT 1



WOOD FLAT 2



WOOD FLAT 3




WOOD FLAT 4

3D PATINA EFFECT

Patina Grau



Patina Black

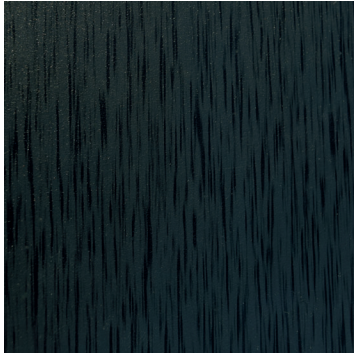


Characteristic


- Smooth (matte), range of decors
- For both indoor and outdoor use
- High abrasion resistance (RUV3)

STUCCO (EMBOSSING)


Mill Finished

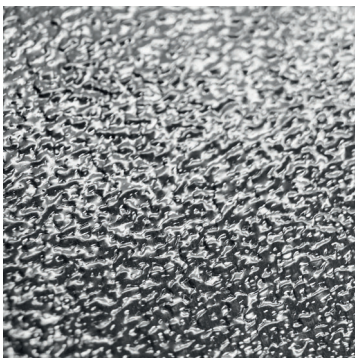

Prepainted

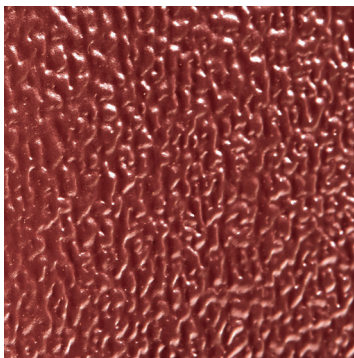

Prepainted textured

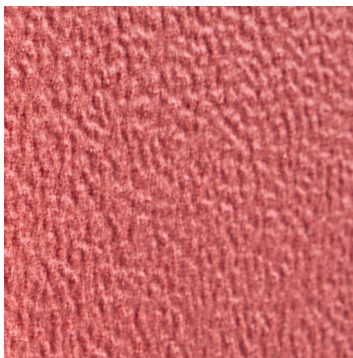

Characteristic

- Plastic surface
- Strengthening of the material
- Optical reduction of gloss

Al 0,4 - 1,5 mm

FeZn 0,3 - 1,0 mm

Width 300 - 1 600 mm


PET FOILS

Surface - smooth | Total thickness of coat - 25 µm

Brick Design




Stone Design

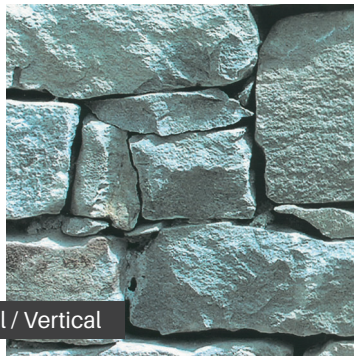

Concrete Lines



Concrete Grey

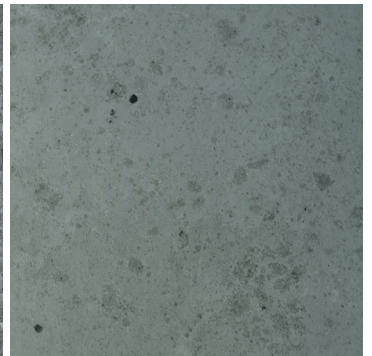

Horizontal / Vertical

PVC FOILS

Surface - structured, smooth | Total thickness of coat - 100 - 150 µm


Food Contact



9001 Food Safe



9003 Food Safe

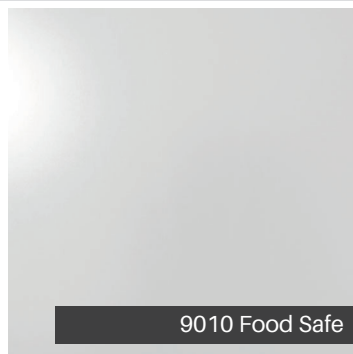

9010 Food Safe



9016 Smooth